


# Input cable specification


Issued date : July, 12, 2019

Input cable for MWDCEs-191-C with single phase

Approved by

 (Signature)  
K. Tamura


Designed by

 (Signature)  
T. Koyama

Murata Manufacturing CO., LTD.

No.	MODEL NAME & SPEC	MAKER	Q'ty	CCN UL FILE No.	REMARKS
1	1711420	PHOENIX CONTACT	1	XCFR2 E60425	
2	HBL2621	HUBBELL	3	-	NEMA L6 30
3	VCT 8mm2 3 cores	MITSUBOSHI CO.,LTD.	3	-	④に挿入する心線はよじること。 The core wire to be inserted in ④ should be twisted. 相当品の使用可。 Equivalent use available.
4	P38	NICHIFU	1	ZMVV E44245	リード線の被覆はカシメないこと。 Do not caulk the lead wire covering.
5	UL STYLE 1283 LF, c-UL AWM 105°C 600V #8AWG G/Y straight line or spiral line or equivalent 相当	-	1	-	④に挿入する心線はよじること。 The core wire to be inserted in ④ should be twisted.
6	HelaShrink TCN20-20.0-BK	HellermannTyton	7	YPDU2 E143529	
7	Ferrules With Insulating Collar AI 10-18 RD	PHOENIX CONTACT	7	ZMLF E488001	専用工具でカシメること。 To caulk with a special tool.

△03 参考

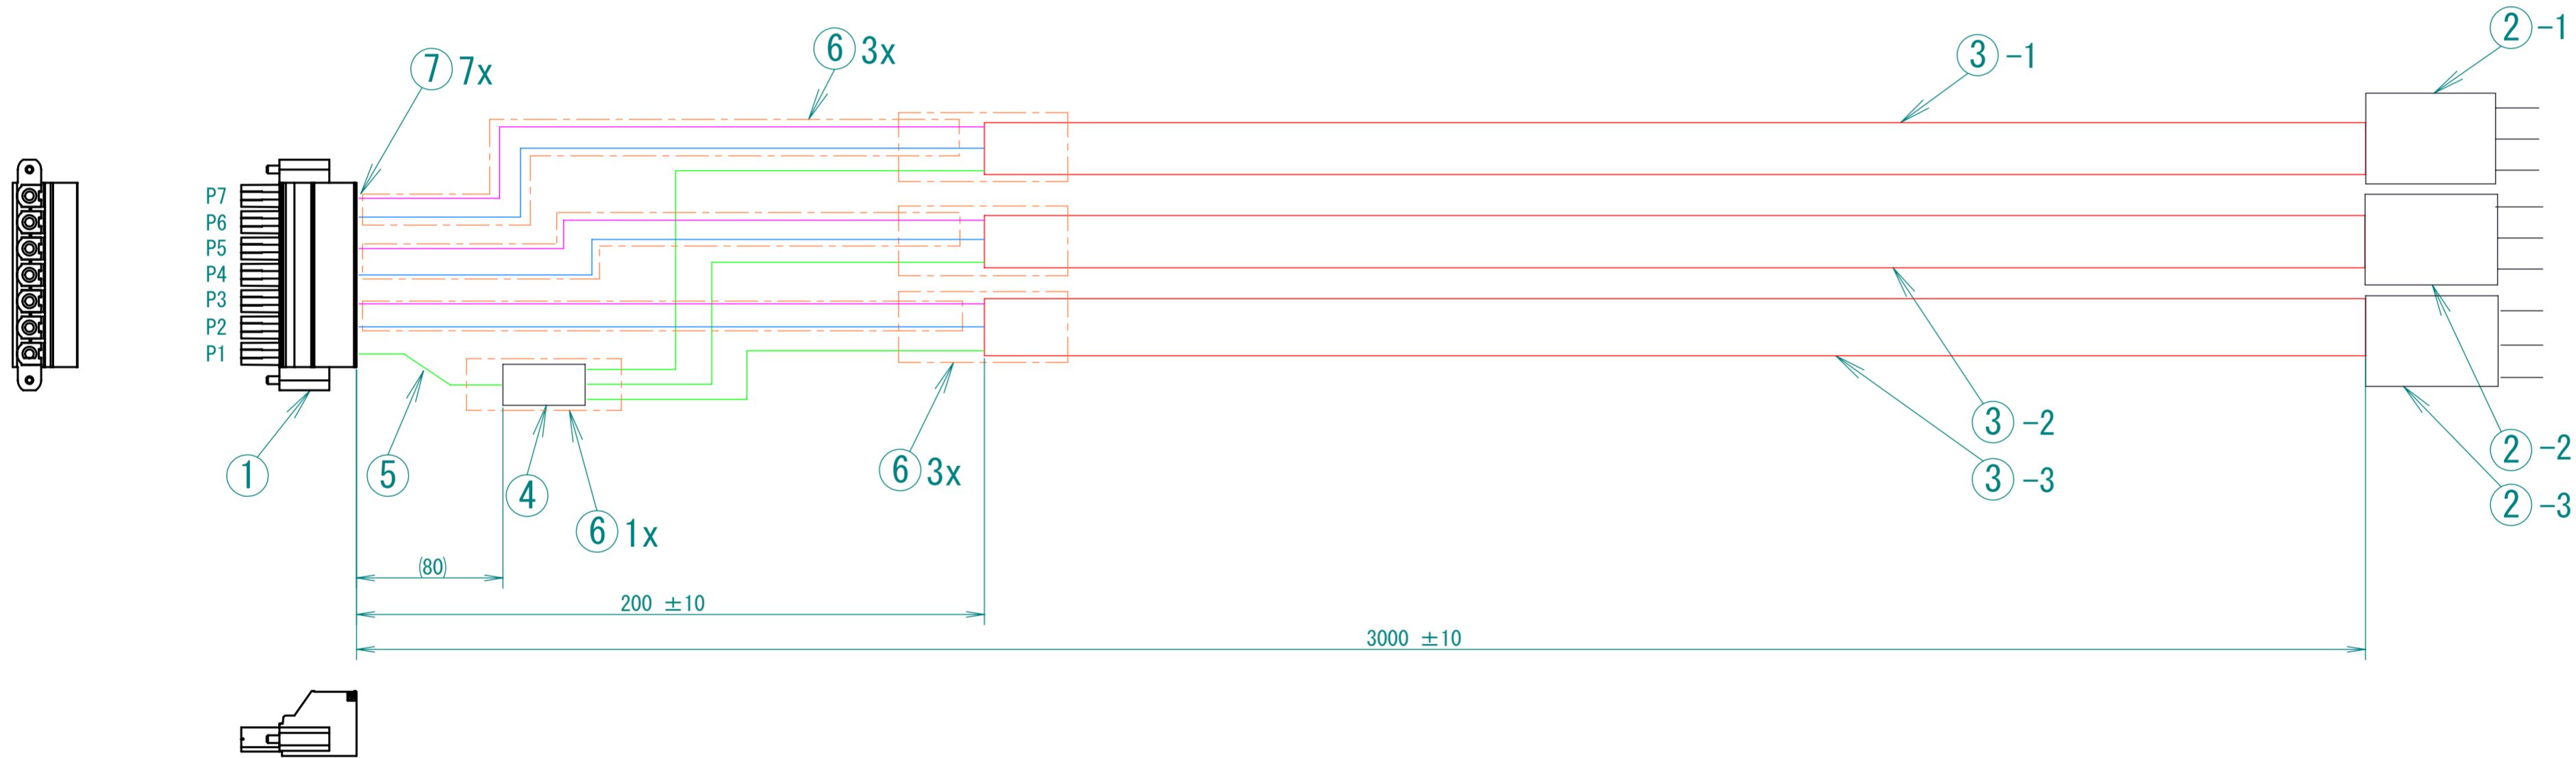

△02

ピン配/Pin Arrangement			
①	Wire	②	
P7	③-1 (Red)	②-1	Y
P6	③-1 (Black)	②-1	X
P5	③-2 (Red)	②-2	Y
P4	③-2 (Black)	②-2	X
P3	③-3 (Red)	②-3	Y
P2	③-3 (Black)	②-3	X
P1	④ (Y/G)	③-1, 2, 3 (White)	②-1, 2, 3 G

NOTES:

- 熱収縮チューブは収縮させること  
Shrink the heat-shrinkable tube.
- 納入時に材料証明書を添付のこと  
Should attach material certificate at delivery.
- RoHS規制に対応のこと  
Should use the material adapted for RoHS.
- ULワイヤリングハーネスプログラム適用のこと  
Should meet UL Wiring harness program.

Unit 単位	mm	Scale 尺度	NTS	Approval 承認	K. Tamura	Check 検査	M. Okada	Parts Description 通称名	AC-POWER CABLE_7-3
				Confirm 確認	H. Satoh	Prepare 担当	H. Isei	Model Name 機種名	***
Date 日付	2019/03/19	File No.	P2PA1450XB_AC-POWER CABLE_7-3 (03)		MURATA Part No. 村田部品番	P2PA1450XB	03 Ver.		